


649.40.520.xxx  
Concealed thermostat body  $\frac{3}{4}$ "



- for assembly set XXX.40.520.xxx
- flow rate 12 GPM at 60 PSI
- volume control not included
- integrated screens and one outlet plug included
- bottom outlet for tub spout only
- if PEX is utilized, oversize the supply line to 1" for full flow capacity
- min. install depth:  $1 \frac{15}{16}$ "
- max. install depth:  $2 \frac{17}{32}$ "
- fast thermal element shut-down in case of cold water loss, fast response time to reduce hot and cold spikes
- complete with mud guard for installation

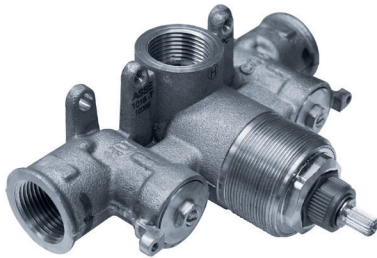